

**45069****ACCESSORY STORAGE BRACKET**


3/14/22



GROSS LOAD CAPACITY : 350 LBS.

FOR MORE INFORMATION LOG ONTO [WWW.CURTMFG.COM](http://WWW.CURTMFG.COM)  
HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-877-287-8634

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	10-10659	BOLT, LAG, HEX HEAD, 3/8" X 2-1/2", ZP
2	2	30-00012	WASHER, FLAT, 3/8

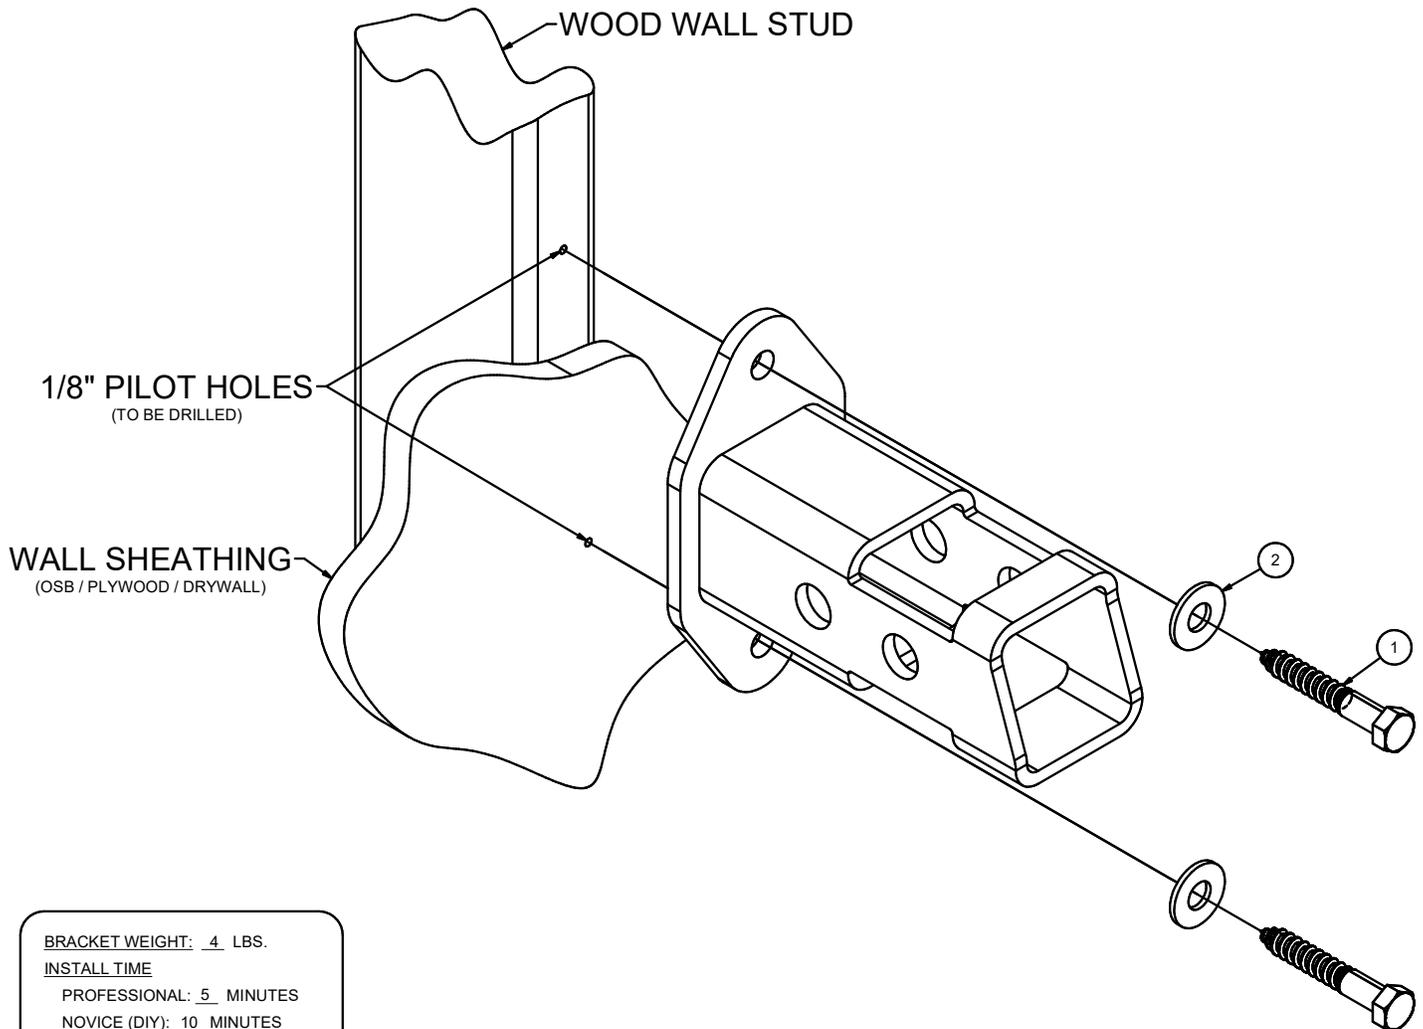

BRACKET WEIGHT: 4 LBS.

**INSTALL TIME**

PROFESSIONAL: 5 MINUTES

NOVICE (DIY): 10 MINUTES

**INSTALL NOTES:**

- DRILLING REQUIRED

**INSTALLATION STEPS**

1. Locate a stud in the wall at the desired height and pre-drill (2) 1/8" holes using the organizer bracket holes as a template.
2. Place bracket against wall and loosely install the lag bolts with washers with a 9/16" socket and ratchet.
3. Tighten lag bolts until bracket is held firmly against wall.

Note: Periodically check to make sure bracket is secure and wall is sound.

**PERIODICALLY CHECK THIS PRODUCT TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.**

CURT Manufacturing LLC., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, CURT Manufacturing LLC., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration, misuse of, or improper installation of this product voids the warranty. CURT Manufacturing LLC.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.