

INSTALLATION INSTRUCTIONS: REALTRUCK BACKRACK KIT #40122 2019-CURRENT Chevy Silverado, Sierra

READ THIS NOW!


Your truck should look like the one shown. If you think you are missing any parts, think that this part number is not for your truck or have any installation questions, call our customer service department at toll free:

888-588-6101or locally 800-265-8137.
Other ways to reach RealTruck Backrack:
email: info@backrack.ca
Support@backrack.com



The RealTruck Backrack is secured to your truck with a pair of "Stake Pocket Bolts" specifically designed for your make and model of truck. These bolts mount into each of the two front stake pockets. The RealTruck Backrack assembly sits on the bed rails of your truck and is secured to these Stake Pocket Bolts. If your truck has a BEDLINER we suggest you remove it to install the Stake Pocket Bolts

#	PART	DESCRIPTION	QTY
1	INST000	Installation Instructions	1
2	FYZ008	1/2"-20 Nylon Hex Lock Nut	2
3	FYZO11	1/2" Flat Washer	2
4	FYZ014	1/2"-20 x 3.25" Carrige Bolt Grade 8	2
5	FYZ016	5/8"-11 Hex Nut	2
6	FYZ017	5/8" Lock Washer	2
7	FYZ018	5/8" Flat Washer	2
8	FYZ020	3/4" Lock Washer	2
9	FYZ021	3/4" Flat Washer	2
10	DB9X8ET	Poly Bag	1
11	SF004	Foam Pad	4
12	SF005	2 Sided Tape SPGPSA1x2x2	4
13	Small BACKRACK Decal	BACKRACK DECAL 5/8" x 9"	2
14	RMB801D	UNIVERSAL Rear Mount Bracket Driver Side	1
15	RMB801P	"UNIVERSAL Rear Mount Bracket Passenger Side"	1
16	RP422D	40122 Rail Plate Driver	1
17	RP422P	40122 Rail Plate Passenger	1
18	TCA012D	Tonneau Cover Adapter Driver	1
19	TCA012P	Tonneau Cover Adapter Passenger	1
20	SBY960S	Stake Bolt - Long Version	2
21	FYZ062	3/4"-10 x 1.25" Full Thd Hex Bolt Grade 5	2

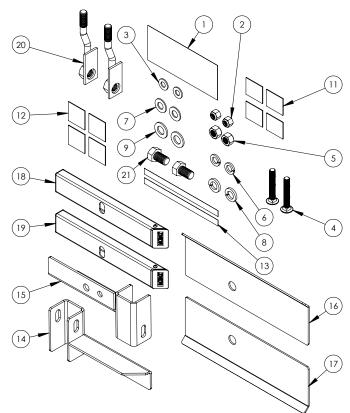


FOR MORE INFORMATION SCAN HERE!




REALTRUCK BACKRACK®

Apply double sided adhesive pads to this side of rail plate (driver and passenger) 1 on each end, approximately center.

Remove 2nd side in step 4 to adhere to truck rail.



Apply single sided adhesive pads to this side of spacer.
Apply RealTruck
Backrack decal
Can also be applied as last step to ensure facing outward



1a


Insert stake pocket bolt, fasten as shown with supplied washers and bolt.
Hand tighten until final step.

3/4"WASHER (SMALL)

1b

Fasten BRealTruck
Backrack to the Rail
mount bracket.
Finger tighten at this
stage.

IMPORTANT
Install the carriage
bolt as shown in the
diagram with the
round head closest
to the cab. Failure to
do so could result in
damage to the cab
or rear window.



3

3/4 HEX BOLT

Fasten RealTruck Backrack Assembly to the Stake pocket bolt as shown.

Center the RealTruck Backrack assembly on the truck and final torque all nutand bolts starting with the bolts on the inside of the truck bed, then the rail mount bracket and finally the main RealTruck Backrack carriage bolt.

